

06/22/99

U.S. PTO

Express Mail Label No. EJ 874959349 US

12

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

693

Total Pages in this Submission

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**METHOD OF EDGE GLUEING, AND A TENSIONING AGGREGATE WITH A DEVICE FOR EDGE GLUEING**

and invented by:

**Andreas STOEHRMANN, Marc-Aurel VOTH**

1c549 U.S. PTO

09/337947

06/22/99

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 33 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

Express Mail Mailing Label	
Number	<u>EJ 874959349 US</u>
Date of Deposit	<u>June 27 1999</u>
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.	

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

693

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*

- a. ☒ Formal                      Number of Sheets                      6  
b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_

4. ☒ Oath or Declaration

- a. ☐ Newly executed *(original or copy)*                      ☒ Unexecuted  
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*  
c. ☒ With Power of Attorney                      ☐ Without Power of Attorney  
d. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche *(Appendix)*

7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*

- a. ☐ Paper Copy  
b. ☐ Computer Readable Copy *(identical to computer copy)*  
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☐ Assignment Papers *(cover sheet & document(s))*  
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*  
10. ☐ English Translation Document *(if applicable)*  
11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations  
12. ☐ Preliminary Amendment  
13. ☒ Acknowledgment postcard  
14. ☒ Certificate of Mailing

☐ First Class                      ☒ Express Mail *(Specify Label No.):* EJ 874959349 US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
693

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	17	- 20 =	0	x \$22.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$760.00

- ☒ A check in the amount of **\$760.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-4675** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

Dated: JUNE 21, 1999

cc:

BE IT KNOWN that WE, **Andreas STÖHRMANN and MARC-AUREL VOTH**, have invented certain new and useful improvements in

**METHOD OF EDGE GLUEING, AND A TENSIONING AGGREGATE  
WITH A DEVICE FOR EDGE GLUEING**

of which the following is a complete specification:

## BACKGROUND OF THE INVENTION

The present invention relates to a method of edge glueing and to a tensioning aggregate which is provided for a device for edge glueing.

5 During edge glueing an edge hardening medium which will be referred as a glue later on, is applied to the edges of a textile product web. The hardening of the edges is provided for preventing a rolling-in on the edges during making the product ready. The tendency of the non treated edges to roll in is very high in knit wear. In some weave wear there is a tendency of edge fringing. This is prevented by hardening of the edges.

10 The German patent document DE 12 26 978 discloses a process in which an expanded product web is sprayed with glue at its edges with stationary spraying nozzles under which the product web is transported. Immediately after the spraying, the glue is dried by a drying device with hot air. The spraying nozzle disclosed in this reference is problematic with  
15 regard to exact dosing of the glue.

An improved dosing is performed in an edge glueing device disclosed in the German document DE 38 34570A1, which is arranged at an input of a tensioning frame and has an application roller which partially dips into a trough filled with glue. The periphery of the application roller comes

in contact with edge strips of the material web held for example in a needle chain. The application roller which is set in rotation by the material transportation, transports the glue as throughgoing strips or in form of transverse lines, in the event if the periphery of the application roller has an inclined toothing, onto the material web. The corresponding tensioning aggregate provided with an edge glueing device with application rollers is known from the catalog "Synergie-Spannrahmen KTT 2000" of Babcock Textile Maschinen GmbH.

During the application of the glue by an application roller the application quantity depends on the dropping speed, or in other words on the viscosity of the glue, on the surface quality of the glue wheel and the tendency of the glue to form a dried liquid surface, and on the advancement, the absorption of the product and the speed of the web. The application quantity therefore can not be arbitrarily selected in view of the above listed factors.

In the German document DE A2 29 0 54 a material web is provided with an edge hardening of linear elements, whose expansion components perpendicular to the edge extend transversely to the extension components parallel to the edge. This makes possible a hardening of the edges without disturbing elasticity loss in the material web longitudinal direction.

5 A further problem in the edge glueing is the drying of the applied glue. The application of the glue is also performed after the last moisturizing stage of the textile process and before the drying stage. In this case the drying must be adjusted to the higher water content of the product web edges by the glue from up to 15%. For this purpose special drying devices in tensioning frame dryers are disclosed for example in the patent document Z 37 06 615 C2, DE 81 11 908 UNDE 195 25 545. When the glue application is performed after the drying of the product web, an initial drying device is required.

10 It is known from the German patent document DE 195 22 124 A1 it is known to use, instead of conventional water containing synthetic plastic dispersions, melting adhesives as a glue. The melting adhesives are applied at a temperature of 150-200°C and hardened in several seconds without a drying device. However, for melting of the glue, it requires special application devices provided with heating means, such as for example spray  
15 application heads, single hole valves or slot valves.

20 German patent document DE 195 06 294 A1 discloses a UV hardenable, water free synthetic plastic as a further hardening agent for hardening of the edges of threaded webs. The synthetic plastic is applied with a pattern such as transverse strips, circles, meanders, etc. with freely

remaining cutting edge and subsequently hardened by UV light of a UV lamps.



## SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a method of edge glueing which avoids the disadvantages of the prior art.

5 More particularly, it is an object of present invention to provide a method for edge glueing which requires less glue and therefore less drying energy than in the case of application by an application roller.

It is also an object of present invention to provide a tensioning aggregate for performing the inventive method.

10 In keeping with these objects and with others which will become apparent hereinafter, one feature of present invention resides, briefly stated in a method of edge glueing, in which a glue is applied in a spin spraying process.

15 With the inventive method the glue is applied in the spin spraying process on the edges of the product web. The spin spraying nozzles are utilized, which produce a fine jet moving over a circular path. Such a spin spraying nozzle is disclosed for example in the patent document EP 0 677 333 A1. During the transportation of the product web under the spin spraying nozzles the circular path of the glue jet is pulled out into a

spiral. By producing fine glue spirals, a sufficient hardening with a low glue quantity is provided. The lower glue quantity makes possible, in addition to saving of the glue, also saving of drying energy. The fine glue spirals have a certain elasticity for the product web, which facilitates the further treatment stages. The glue track can be applied continuously or intermittently.

A predetermined, constant distance of the spin spraying nozzle guarantees a uniform glue application. By varying in distance, the width of the glue track can be changed. In particular, smaller glue tracks can be produced, so that during making ready of the product only a small fraction of the product web must be cut. Also, the throwing-in tendency can be influenced over the width of the glue track.

In addition to the variation of the distance of the spin spraying nozzle to the contact web, also the pressure with which the glue is supplied as well as the pressure of the suppl air can be varied. Thereby it is possible, also in the case of changes of product web speed, to maintain the application quantity constant.

The inventive spin spraying process guarantees also a higher reproducibility of the application quantity of the glue than in an application by a glue wheel.

The maximum product web speed in the event of the spin spraying depends less on the viscosity of the glue than during the application of the glue with a glue wheel. A glue with a higher viscosity can be utilized. A mixing of the glue with water for reducing the viscosity is no longer necessary, or the required water quantity is lower. Also, a lower water content of the glue leads to a drying with a lower energy consumption.

The glue application can be performed by corresponding arrangement of the spin spraying nozzle above or below of the expanded product web at its edges, or in its central region. With the use of different spin spraying nozzles, different glue tracks are possible.

A special uniform pattern of the glue application is obtained when in accordance with the present invention the product web is smoothed by providing a certain longitudinal tensioning. When the product web is smoothed, a uniform glue application is possible with a particularly low glue quantity.

In accordance with a preferred new feature of the present invention, the glue can be formed as conventional synthetic plastic dispersions or synthetic plastic solutions used for edge hardening. In addition, also starch, bone glue or further organic solutions can be utilized.

5 A warming of the glue, in particular of synthetic dispersions or synthetic solutions, before the spin spraying in particular at a temperature of 20-80°C, reduces the viscosity of the glue. The prewarmed glue can be sprayed without being dissolved or less dissolved and dries faster than glue sprayed at room temperature.

10 The quantity of the glue applied by the spin spraying nozzle can be regulated by variations of the pressure of the glue supplied to the spin spraying nozzle and/or by the pressure of the air supplied to the spin spraying nozzle. The applied glue quantity can be determined by resistance measurements.

15 In accordance with a further feature of the present invention, a tensioning aggregate is proposed with a device for edge glueing, in which the product web is expanded and smoothed, and the spin spraying nozzle is located at a predetermined distance relative to it. The spin spraying nozzles are located either above or under the product web at the both edges and, in the case of a doubled product web width, are arranged in the middle of the product web.

20 The inventive tensioning aggregate can be formed as a tensioning frame in some cases with a dryer, as over extension filled with a subsequent shrink dryer or a leveling frame.

In accordance with a further feature of the present invention, the spin spraying nozzles are arranged behind or at the height of the expanding means and before the mounting means. This arrangement of the spin spraying nozzles utilizes the region of the known tensioning aggregate before the mounting means, in which the product web is expanded and smoothed. The mounting means, such as pressing rollers or pressing bands during needling and corresponding means during clamping have recesses for the glue tracks.

In accordance with a further feature of present invention, the tensioning aggregate is provided with the device for edge glueing on the tensioning chain. For this purpose, it has means for loosening the product web from the tensioning chains and smoothing the product web and the mounting means. The spin spraying heads are arranged at a certain distance above or below this means. The mounting means arranged behind the means for a new mounting of the product web on the clamping chain have also recesses for the glue track.

In order to provide adjustments to different web speeds or different feeds, a pressing brush is arranged vertically displaceably and the mounting means is arranged horizontally displaceably.

In accordance with another embodiment of the present invention, the pressing roller is designed as a negative pressure roller, so as to improve the flatness of the product web on the needle roller and thereby the glue track.

5 In accordance with a further embodiment of the present invention, the arrangements for edge glueing are especially simple when they are provided with means for releasing the product web from the retensioning chain and for scaling as well as with holding means, and also in another embodiment with a pressing holder and a holding wire.

10 The novel features which are considered as characteristic for the present invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when  
15 read in connection with the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a tensioning aggregate in accordance with a first embodiment, with spin spraying nozzles arranged before mounting means in an inlet region;

Figure 2 is a view showing a lateral section of the aggregate of Figure 1, on an enlarged scale in accordance with the present invention;

Figure 3 is a plan view of an arrangement of spin spraying nozzles in accordance with the present invention;

Figure 4 is a view showing a tensioning aggregate in accordance with a second embodiment with a device for edge glueing arranged on a tensioning chain and provided with spin spraying nozzles;

Figures 5 and 6 are views corresponding to Figures 2 and 3 but showing the second embodiment of the present invention; and

Figures 7 and 8 are views showing a further device for edge glueing with spin spraying nozzles of a simplified construction.

## DESCRIPTION OF PREFERRED EMBODIMENTS

### Example 1

A tensioning aggregate in accordance with a first embodiment of present invention has an inlet device 1, a tensioning chain 2 arranged at both lateral edges of the tensioning aggregate, and a first drying field 3 of a dryer 4. An outlet device of the tensioning aggregate is not shown.

The inlet device 1 has an operator stand 5, an inlet desk 6 with pulling means, for example driveable rollers, and a device such as a needling device 7 for mounting of product web edges on the tensioning chain 2. In the inlet device 1, a product web 8 passes under the operation stand 5. During its further running in the inlet desk 6, the product web 8 is guided around an expansion roller 9, a driveable pulling roller 10, a further extension roller 1, a guiding roller 12 and a further driveable pulling roller 13, toward a needling device 7.

The needling device 7 has an expansion means. In particular, the needling means include in this example at each side three roll fingers 15 arranged in the transporting direction 14 of the product web one after the other, and a mounting means for mounting the edges of the product web 8 on the tensioning chain 2, in particular a brush band 16 arranged above the product web 8 and a pressure band 17 arranged under the product web 8. The needling fingers 18 include driveable, conical rollers whose diameter



reduces toward the edge of the product web 8. Their axes are substantially offset relative to one another so that the product web 8 is guided slightly wavelly, over the first, under the second, and over the third rolling finger 15.

A tensioning chain 2 surrounds a chain band 18 with a needle box 19. It is guided in an upper and in a lower chain guide 12 and deviated on a front chain wheel 21 and a rear chain wheel which is not shown in the drawings. The chain wheels 21 are arranged in this case vertically. The tensioning chain 2 with the chain band 18 and the chain guide 20 extends through the dryer 3. The position of the chain band 18 is shown in Figure 1 by dash lines. In a first drying field 3 of the dryer 4 the position of a circulating fan 22 is identified.

A device for edge glueing has spin spraying nozzles 23 which in this example are arranged at the height or behind the expansion means or before the mounting means. Each spin praying nozzle 22 is mounted above the third rolling finger 15 of the needling device 17 at both sides of the tensioning aggregate 2. The position of the spin spraying nozzle 23 is selected so that a projection of an opening of the spin spraying nozzle 23, or in other words the bottom surface of a spraying cone exiting from the spin spraying nozzle, is located on the product web 8 on the inner side of the needle block 19 of the tensioning chain 2 near the needle box 19, and an opening surface extends horizontally or at an acute angle to horizontals. In

this example, the opening surface extends at an acute angle which opens opposite to the transporting direction, or in other words the axis of the spraying cone extends at an acute angle to verticals.

The brush band 16 has two bands 24 and 25, which are guided around a greater roller 26 which is a front roller as considered in the transporting direction 14, and also over a smaller roller 27 located behind it. The bands 24 and 25 are provided with brushes and arranged at a distance from one another, so that between the brushes a remaining strip 28 is provided. The spin spraying nozzle 23 and the band 24, 25 of the brush band 16 are arranged so that the projection of the opening of the spin spraying nozzle 23 on the product web 8 and the remaining strip 28 between the band of the brush band 16 are located on straight lines extending in the transporting direction 14.

The pressing band 17 is slightly offset forwardly in the transporting direction 14 toward the brush band 16 and arranged inside the chain band 18 with the needle box 19. It is also guided around the greater roller 29 which is a front roller in a transporting direction and around a rear smaller surface. The outer surface of the pressure band 17 is provided with an adhesive material, for example a rubber material. The pressure band 17 and the brush band 16, as shown in Figure 2, are arranged so that they without contacting the product web 8 contact a path extending at an acute

angle relative to the tensioning chain 2. A measuring sensor 31 is arranged behind the needling device 7 before the first drying field 3. It is used for a resistant measurement.

5 The brush band 16 can have only a band with brushes arranged so that at its outer surface in a middle region, a strip which is free from the brushes is retained. In this case, the spring spraying nozzles 23 and the brush band 16 are arranged so that the projection of the opening of the spin spraying nozzle 23 on the product web 8 and the strip 28 remaining free from the brushes in the brush band 16 is located on a straight line extending in a transporting direction 14.

10 Alternatively, the tensioning chains 2 of the chain bands 18 can be provided with tensioning clamps. Instead of the upper brush band 16 and the lower pressure band 16, the device for mounting of the product web edges on the tensioning chain 2 has means for pressing the product web 8 on the clamps and for closing the clamps. The tensioning chain 2 can be provided also with horizontal chain wheels.

15 In wider tensioning aggregates in which product webs 8 of a double width are treated, two spin spraying nozzles 23 are arranged in the center of the product web 8.

During the operation, for example a moist product web 8 is supplied under the operation stand 5 through and to an inlet desk 6. In a further course in the inlet desk 6, the product web 8 is guided over the expansion roller 9, the driveable pulling roller 10, the expansion roller 11, the guiding roller 12, and the driven pulling roller 13 toward the needling device 7. Forces which act at both edges on the product web 8 are applied to the expansion rollers 9 and 11 so that it is expanded and smoothed. The pulling rollers 10 and 13 accelerate the product web 8 to a desired speed. The peripheral speed of the pulling rollers 10 and 13 is between 20 and 40 m/man ending on the treatment process. In the clamping aggregates 2 with the dryers 4 for after treatment of wet treatment processes the speed is between 25 and 35 m/min.

In the needling device 7 the edges of the product web 8 are outwardly smoothed by three roll fingers 18 and thereby further expanded. A first roll finger 15 acts downwardly, the second roll finger 15 acts from above, and the third roll finger 18 acts from below on the product web 8. In a transporting direction 14 behind the roll fingers 18, the edges of the product web 8 are first engaged from below by the pressure band 17 and then from above by the brush band 16. The pressure band 17 and the brush band 16 move with a slightly higher speed than the pulling rollers 10 and 13.

5 The distance of the spin spraying nozzle 23 arranged above the third roll finger 15 from the upper surface of the product web 8 is between 3 and 30 mm. In processes in connection with a dry treatment of woven and knitted fabrics, such as a dry treatment in the tensioning aggregate and a dryer or for leveling in a shrink dryer, a distance amounts to 3-30 mm. In this example, it amounts to 18 mm.

The spin spraying nozzle 23 can be formed as a point nozzle with a diameter of the opening of 2-5 mm. In this example the diameter of the opening is 3 mm.

10 The glue which is used here can be an organic solution or dispersion with water, starch or bone glue. Preferably, it is a glue which is soluble in water, softener-free and self-cross linking. It is preferably a synthetic plastic dispersion, in particular an ether polymer dispersion, or a synthetic plastic solution. The glass conversion point of the glue must be  
15 between +20 and +35°C, for example +30°C.

The glue is supplied to the spin spraying nozzle 23 with an over pressure of 0.1-0.3 bar, for example substantially 0.2 bar, and the air is supplied with a pressure which is adjustable from 1-6 bar. The desired application quantity is adjusted with the help of the values determined by the

measuring sensor 31, by variation of the pressure of the glue and/or the pressure of the air.

The spin spraying nozzles 23 produce a fine jet of glue which moves over a circular path and acts perpendicularly under the spin spraying nozzles 23 on the product web 8. Due to the movement of the product web 8 under the spin spraying nozzles 23, the circular path of the jet is pulled out to form a spiral 31. In other words, the spin spraying nozzles 23 produce spirals 31 on the movable product web 8.

The tracks of longitudinally pulled spirals 31 of glue are formed on the edges of the product web 8. In this example, the glue is applied continuously. It forms a throughgoing track. The glue can be applied intermittently. Thereby tracks with spaced, longitudinally pulled spirals of glue are formed.

In a knitted fabric, for example single jersey, an application quantity of 0.5-1.2 g/g of glue per meter of a track is required on a product web 8. In comparison, during application of the same glue with a glue wheel, substantially 30% more glue is required.

After the application of the glue by the spin spraying nozzles 23, the edges of the product web 8 are first engaged from below by the

pressure band 17 and then from above by the brush band 16. The pressure band 17 and the brush band 16 leads the edges of the product web 8 to the needle box 3. The partitioned brush band 16, which is due to its free strip 28 does not contact the product web 8 at the glue tracks, presses the product web 8 in the needle box 19. Since the speed of the brush band 16 and the pressure band 17 is greater by 20-70% preferably by 25-30% then the speed of the tensioning chain 2 and thereby the inlet box 19, the edges of the product web 8 are pressed wavy in the needle box 19. In other words, the product web is needled with an advance of 20-70% in particular 25-30%.

The needed product web 8 is transported in the dryer 4 and is dried, in some cases with shrinkage. The energy required for drying of the edges of the product web 8 is lower because of the lower quantity of glue than in the case of an edge glueing with a glue wheel.

### Example 2

A tensioning aggregate in accordance with a second embodiment is different from the aggregate of the first embodiment in that the device for edge glueing is located behind the inlet device 1 on the tensioning chain 2. It has at each edge or on early spraying point of the product web 8, a spin spraying nozzle 23 as well as means for loosening the product web 8 from the tensioning chain 2 and for smoothing the product

web 8 and the mounting means for another mounting of the product web edges of the tensioning chain 2.

5 In this embodiment of a tensioning aggregate with a tensioning chain 2 with a needle box 19, has means for loosening and smoothing of the product web 8, and in some cases driveable brush rollers 33 for holding the product web 8 on the needle box 19 and a driveable pressing roller 34. The mounting means has a driveable brush roller 35 with a recess for the glue track. The brush rollers 33, the pressing rollers 34, and brush roller 35 are located in a transporting direction 14 one after the other with small distances therebetween. The brush rollers 33 and 35 are located above the product web 8.

10 The pressing roller 34 is arranged under the product web 8, toward the interior of the product web 8 closely near the needle box 19 of the tensioning chain 2. It extends in a part of its periphery over the plane defined by the both-side chain bands 18. The pressing roller 34 can be formed also as a negative pressure roller.

15 The corresponding spin spraying nozzle 23 is located between the brush rollers 33 and 35, above the pressing roller 34 so that a projection of the opening of the spin spraying nozzle 23 is located inside the position of the needle box in the upper region of the pressing roller. The opening



surface of the spin spraying nozzle 23 extends here horizontally. As in the example 1, it can extend at an acute angle to the horizontal.

The width of the brush roller 35 is selected so that it extends over the needle box 19 and the desired glue track. It amounts to approximately three times the width of the needle box 19. The pressing roller 34 and the brush roller 35 are in contact, if no product web 8 is guided between them and are closed with one another toward the product web inner side. In the region of the glue track, or in other words the extension of the projection of the spin spraying nozzle 23 in the transporting direction 14, the brush roller 34 has a strip 36 which is retained by bristles.

The brush roller 35 and 36 are supported so that they are displaceable horizontally and the pressing roller 34 is supported so that it is displaceable vertically. The pressing roller can be connected with an asynchronous motor.

During the operation, the needled product web 18 is held at its edge first by the brush roller 33 which is driven with the same speed as the tensioning chain 2, in the needle box 19, and is lifted by the pressing roller 34 at its edges from the needle box 19. The pressing roller 34 which is driven with an advance, with which the product web 8 is needled in a needle device 7, with an equalized, higher speed than the tensioning chain 2 lifts the

web product edge from its surface flatly and transports its under the corresponding spraying nozzle 23. The application of the glue by the spin spraying nozzle corresponds to the example 1. In particular, the distance of the spin spraying nozzles 23 to the surface of the pressing roller 34 is fixedly adjusted.

By the subsequent brush roller 34, which is driven at the same speed as the tensioning chain 2, the web product edge, with the same advance as before the spraying, is needled again. The peripheral speed of the brush rollers 33 and 35 and the tensioning chain 2 can be for example 20 m/min, and of the pressing roller 34 with an advance of 25% can equal to 25 m/min.

For adaptation to different advances, the brush rollers 34 and 35 are displaced vertically and the pressing roller 34 is displaced horizontally.

In order to prevent dried glue residuals on the product web during further movement, the device is provided with means for closing the nozzle opening when a stoppage occurs.

### Example 3

A tensioning aggregate in accordance with a third embodiment of the present invention has an arrangement for edge glueing

which, similarly to the tensioning aggregate of the embodiment 2, is located behind the inlet device 1 on the tensioning chain 2. It has on each chain of the product web 8, a spin spraying nozzle 23 as well as means for loosening the product web 8 from the tensioning chain 2 and for clamping the product web 8 and holding means for holding the product web 8.

In the third embodiment of the tensioning aggregate with a clamping chain 2 with the needle box 19, the means for loosening and clamping of the product web 8 have each a pressing roller 37 which is located under the product web 8 and arranged toward the interior of the product web 8 closely near the needle box 19. It extends with a small part of its periphery outwardly beyond the plane defined by the two-side chain bands 18. The height of the outwardly extending part of the pressing roller 38 substantially corresponds to the needle height. The spin spraying nozzle 23 is arranged in the zenit of the pressing roller 37.

The width of the pressing roller 37 is substantially double the diameter of the spin spraying nozzle 23. The spin spraying nozzle 23 is arranged above the outer region of the pressing roller 37. At the outer side, or in other words at the side of the pressing roller 37 facing the edge of the product web 8, a holding means formed as a U-shaped holding device 38 is located. The pressing roller 36 can have a rough outer surface. Due to the

rough outer surface a fine subdivision of the material folds is enhanced. Its outer surface can be also provided with a coated latex band.

The pressing roller 37 is connected with the drive of the clamping chain 2. It can be connected with a torque magnetic motor. A vertical hold of the pressing roller 37 and a hold of the spin spraying nozzle 23 are connected with one another so that the distance between the outer surface of the pressing roller 37 and the spin spraying nozzle 23 is fixedly adjustable. The arrows in Figure 8 mean that the pressing roller 37 and the spin spraying nozzle 23 are jointly height-adjustable.

During the operation, the bottom of the U of the holding wire 38 is located on the product web 8 and holds the outer edge of the product web 8 in the needle box 19. The pressing roller 37 is driven with the same speed as the tensioning chain 2. The pressing roller 38 lifts the product web 8 so far that it abuts on the roller surface of the pressing roller 38 being planely clamped with advancement of the needled product web 8 above the needle box 19, or in other words in material folds which follow one another. The material folds are formed with a rough surface smaller than the material folds formed by the needling in the needle box 19.

It will be understood that each of the elements described above, or two or more together, may also find a useful application in other types of methods and constructions differing from the types described above.

While the invention has been illustrated and described as embodied in method of, and a tensioning aggregate with a device for edge glueing, it is not intended to be limited to the details shown, since various modifications and structural changes may be made without departing in any way from the spirit of the present invention.

Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can, by applying current knowledge, readily adapt it for various applications without omitting features that, from the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention.

What is claimed as new and desired to be protected by Letters Patent is set forth in the appended claims.

## CLAIMS

1                   1. A method of edge glueing, comprising the steps of  
2                   expanding a product web; transporting the expanded product web at least at  
3                   its edges in a predetermined distance from a spraying nozzle; and spraying  
4                   the expanded web with a glue, said spraying being performed by applying  
5                   the glue in a spin spraying process.

2                   2. A method as defined in claim 1; and further comprising  
3                   holding the product web under a longitudinal tensioning.

1                   3. A method as defined in claim 1, wherein said spraying with  
2                   glue includes using the glue composed of a solvent-containing product on  
3                   the basis of water.

1                   4. A method as defined in claim 3, wherein the product is  
2 selected from the group consisted from a synthetic plastic dispersion and a  
3 synthetic plastic solution.

1                   5. A method as defined in claim 1; and further comprising the  
2 step of heating the glue before spraying to a temperature of 20-80°C.

1                   6. A method as defined in claim 1; and further comprising the  
2 steps of measuring a quantity of the applied glue; and regulating the quantity  
3 by varying the pressure of a substance applied by the spin spraying nozzle.

1                   7. A method as defined in claim 6, wherein said regulating  
2 includes regulating by varying the pressure of the glue supplied by the spin  
3 spraying nozzle.

1                   8. A method as defined in claim 6, wherein said regulating  
2 includes varying the pressure of an air supplied through the spin spraying  
3 nozzle.

1                   9. An arrangement comprising a tensioning aggregate; a  
2 device for edge glueing, said tensioning aggregate including a region in  
3 which product web is expanded on its edges and smoothed, said device for  
4 edge glueing including a spin spraying nozzle which is adapted to be  
5 arranged at a predetermined distance from the product web.

1                   10. An arrangement as defined in claim 9, wherein said spin  
2 spraying nozzle is arranged at a predetermined distance from the edges of  
3 the product web.

1                   11. An arrangement as defined in claim 9, wherein said spin  
2 spraying nozzle is arranged at a predetermined distance from the sensor of  
3 the product web.



1                   12. An arrangement as defined in claim 9; and further  
2 comprising a tensioning chain; an inlet device provided with pulling means,  
3 expanding means and mounting means for mounting the edges of the  
4 product web on said tensioning chain and located one after the other, so that  
5 in the region of said pulling means and said mounting means the product  
6 web is expanded and smoothed, said spin spraying nozzle being located in  
7 said region at a height or behind said expanding means in front of said  
8 mounting means, said mounting means being provided with openings for  
9 glue tracks.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2

1                   14. An arrangement as defined in claim 13, wherein the means  
2                   have a pressing roller, said pressing roller being vertically displaceable while  
3                   said mounting means being horizontally displaceable.


1                   15. An arrangement as defined in claim 14, wherein said  
2                   pressing roller is formed as a negative pressing roller.

1                   16. An arrangement as defined in claim 9; and further  
2                   comprising an inlet device; a tensioning chain, said device for edge glueing  
3                   being located behind said inlet device on said tensioning chain with a needle  
4                   box; and means for releasing the product web from the tensioning chain and  
5                   for clamping the product web, and holding means.

1                   17. An arrangement as defined in claim 16; and further  
2                   comprising a pressing roller adapted to be arranged on the edges above the  
3                   product web under said needle box; and a holding wire arranged laterally  
4                   near said pressing roller on said needle box, said spin spraying nozzle being  
5                   arranged above said pressing roller.


### ABSTRACT OF THE DISCLOSURE

In a method for edge glueing and in an arrangement including a tensioning aggregate with a device for edge glueing, a glue is applied in a spin spraying process, and the application is performed on the product web which is extended at the edges and smoothed.

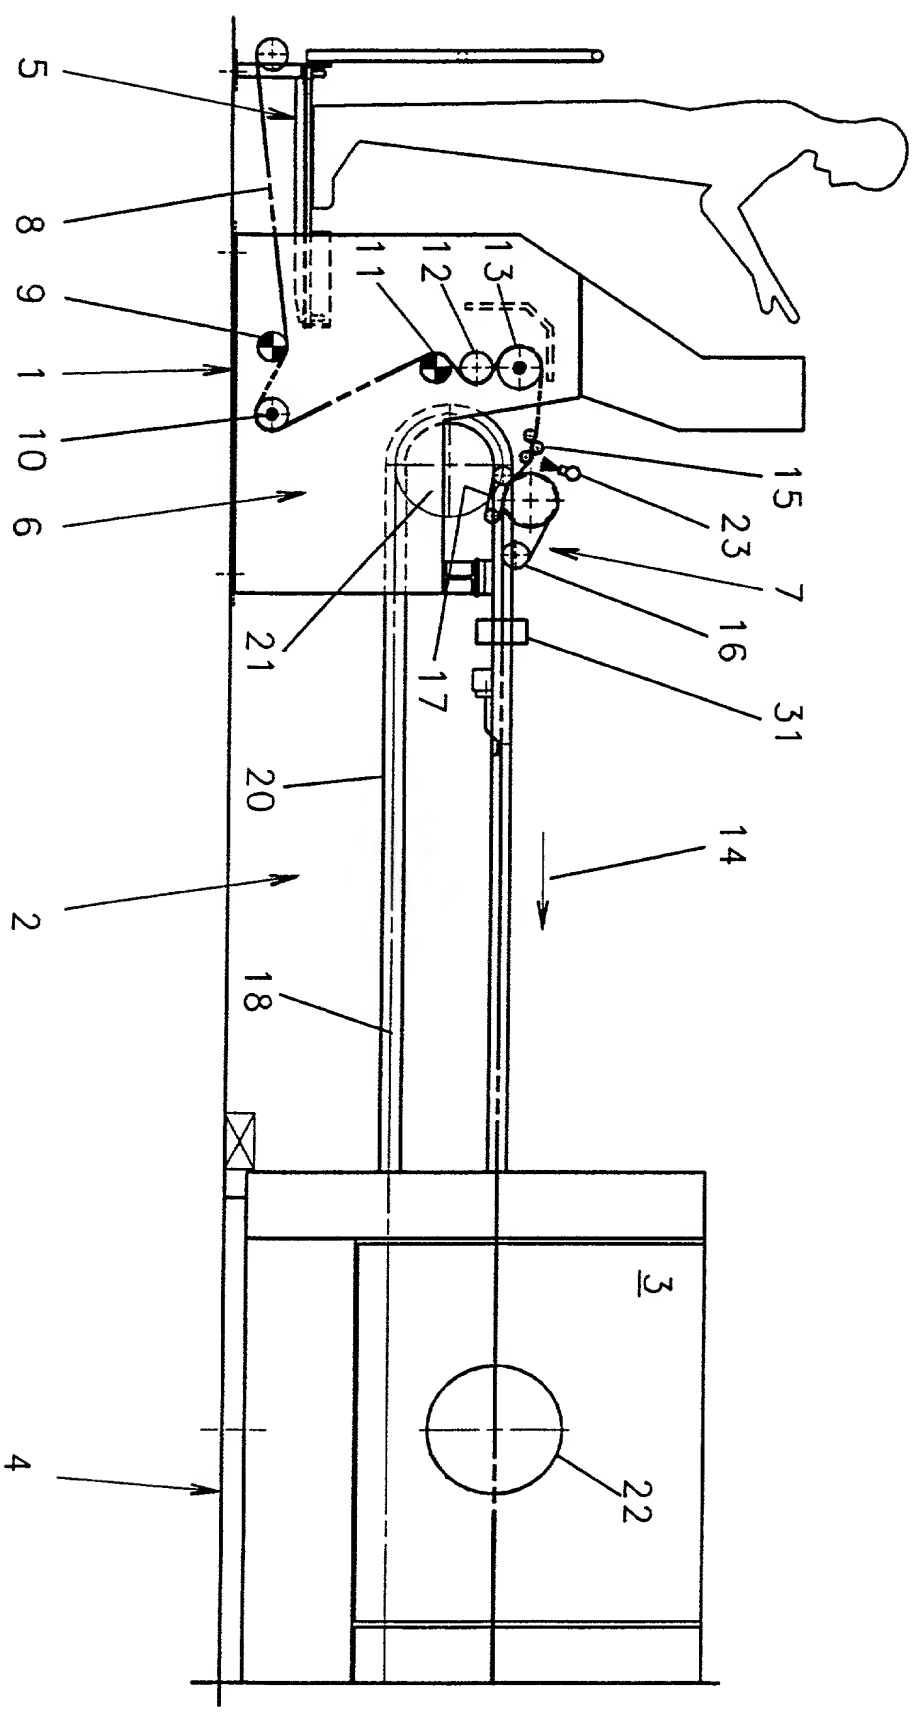


09227947 062299

Figure 1

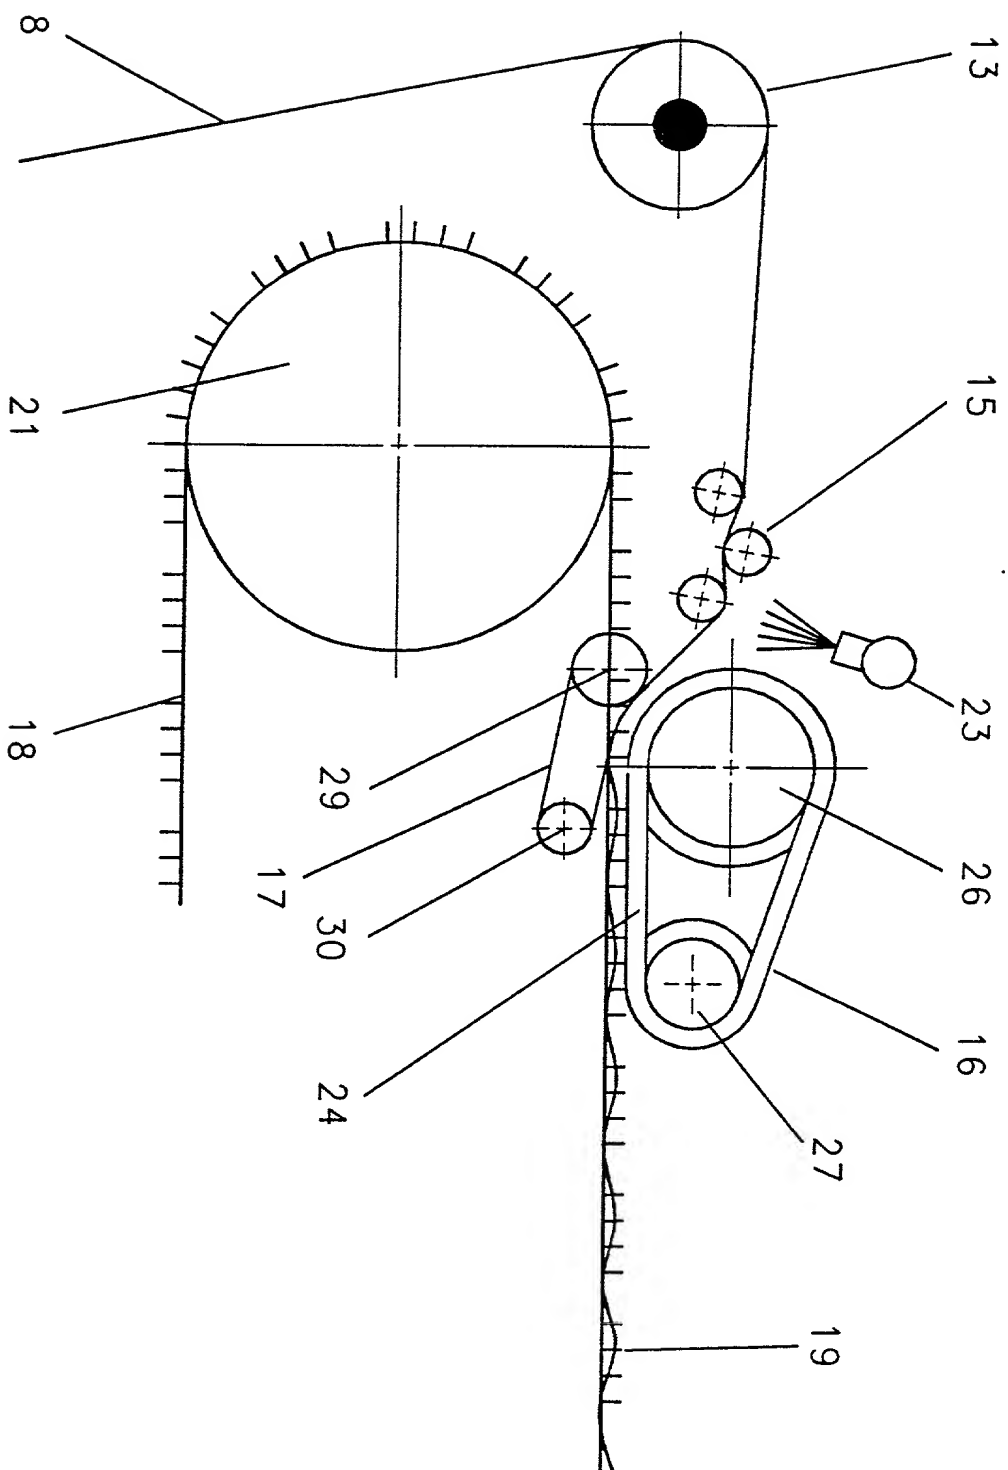


09337947 1362205

Figure 2

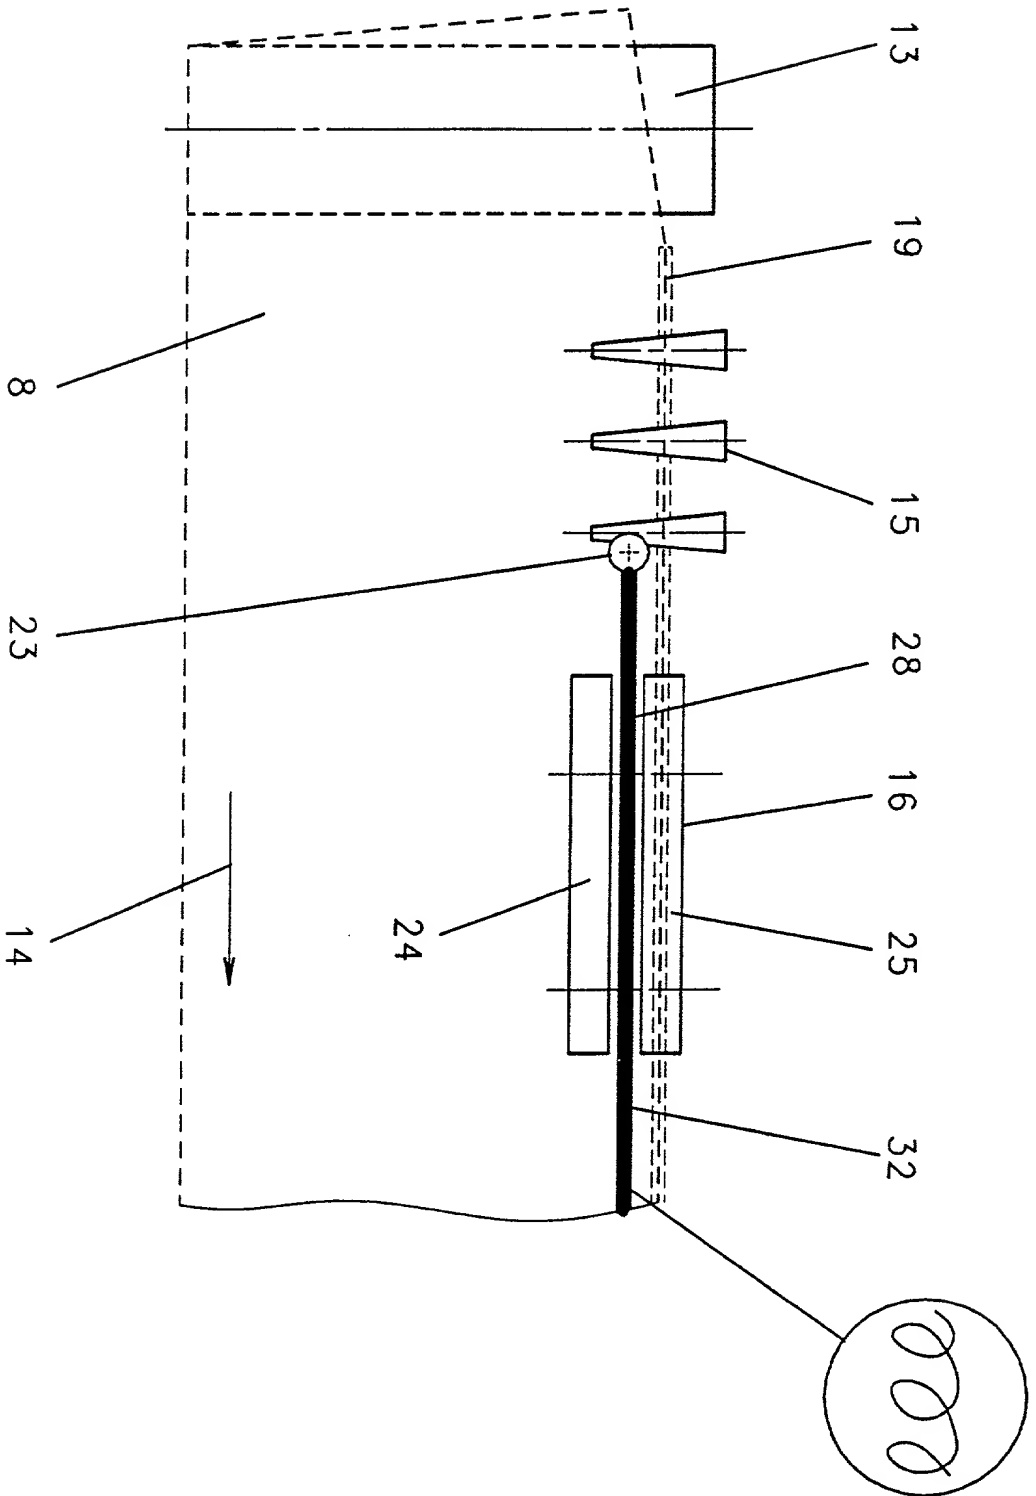

09337947-062209

Figure 3

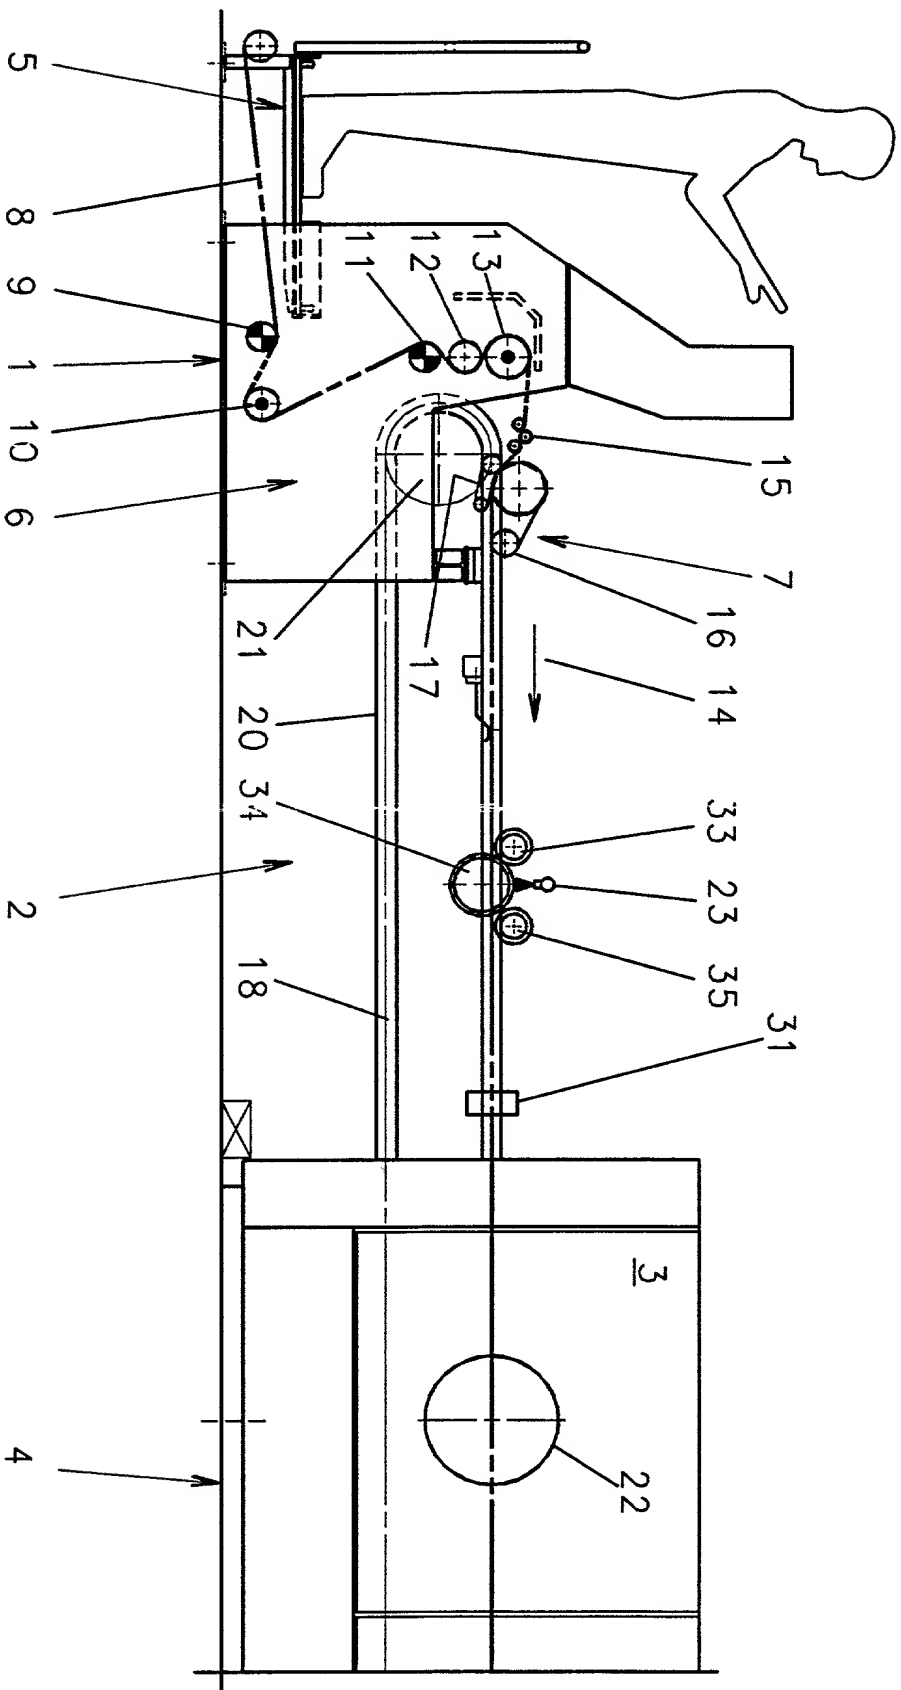


Figur 4


09337947 - 052239




662290 46/8660

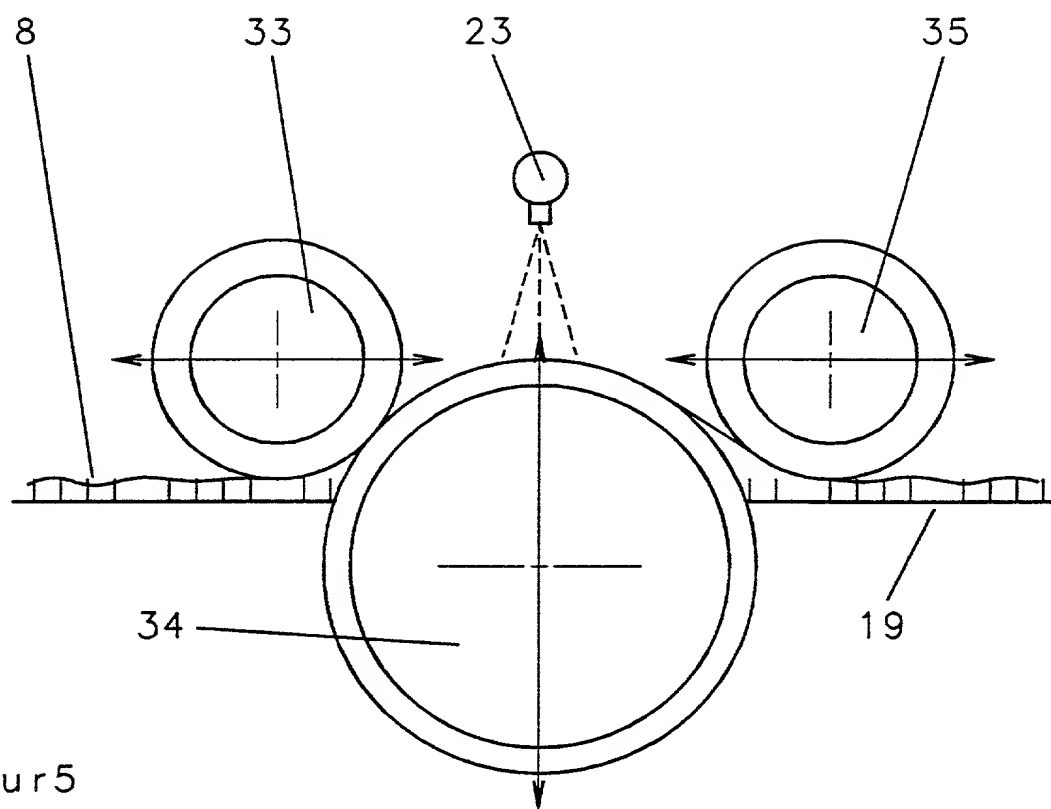


Figur5

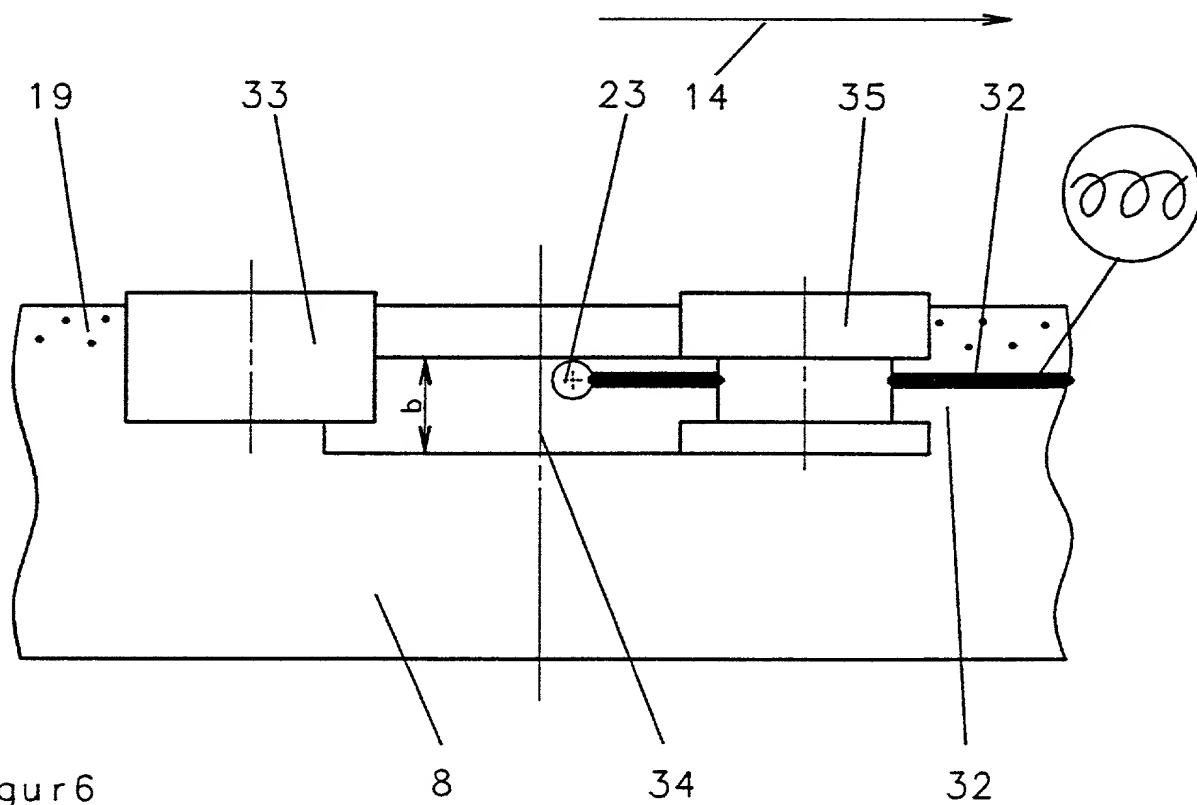

Figur6

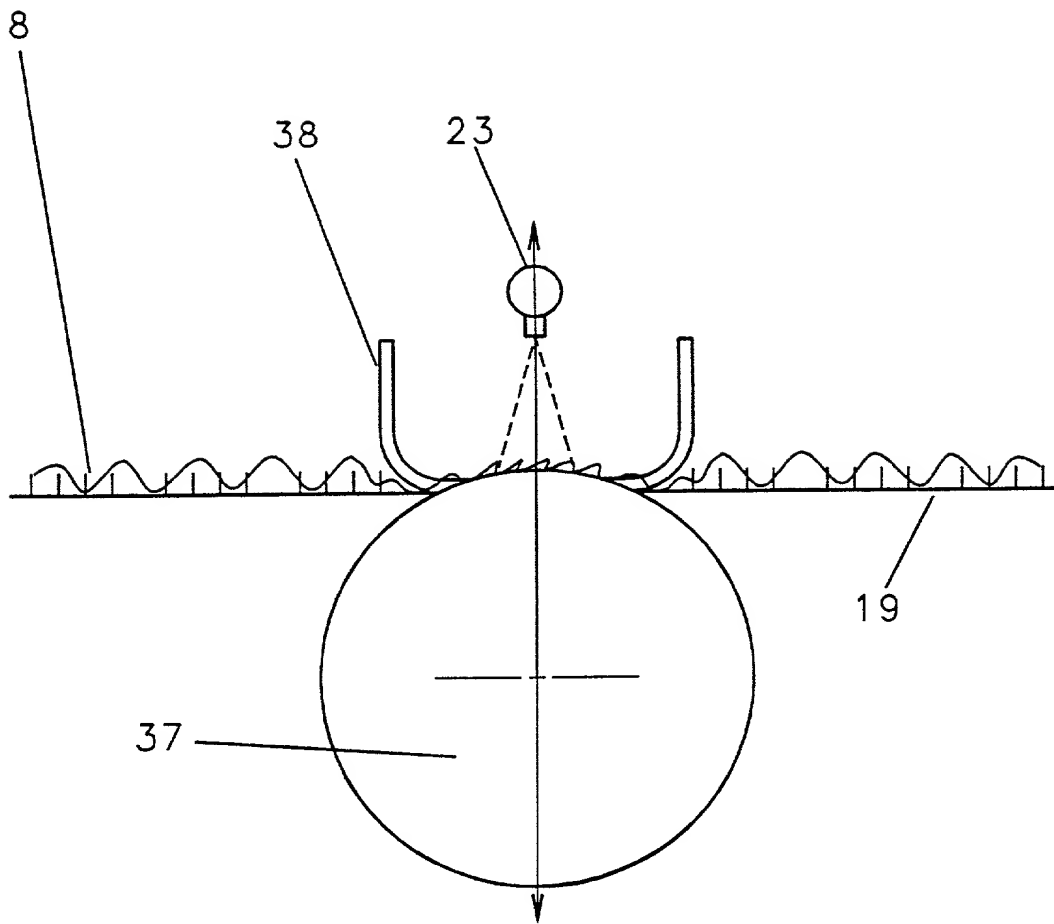

Figur 7

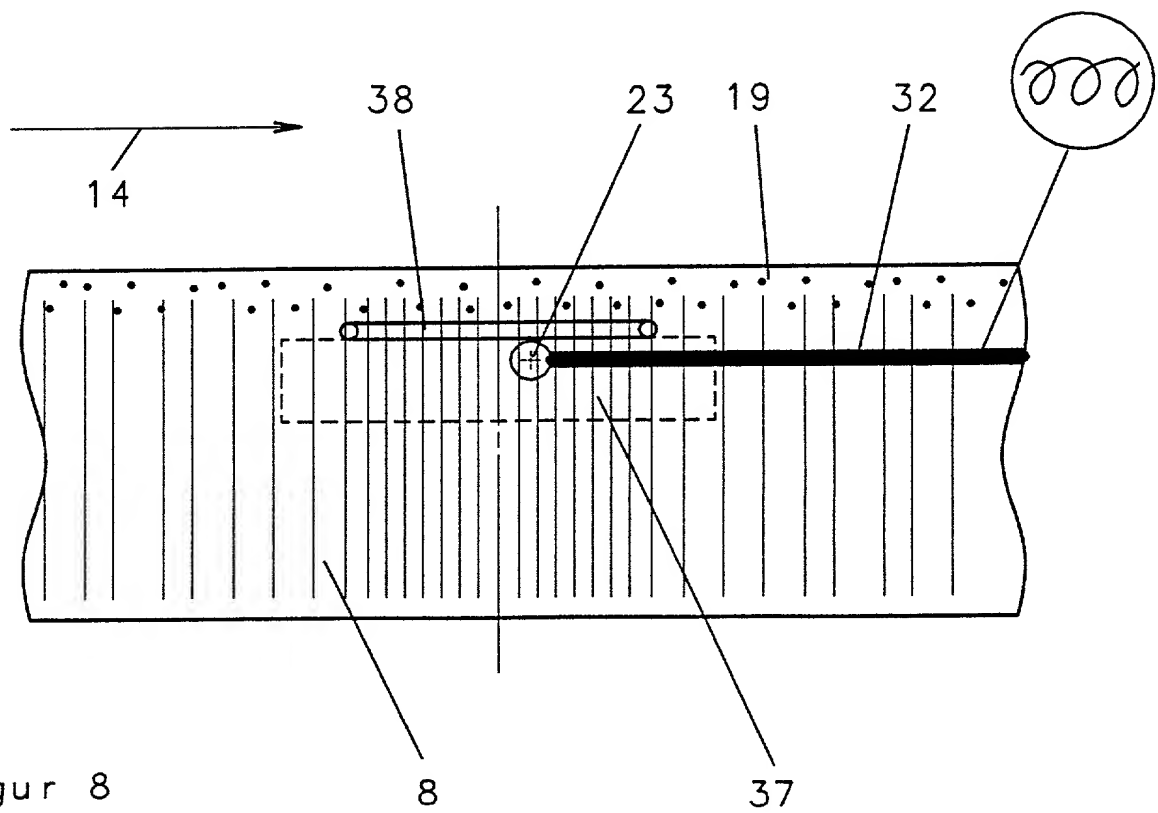

Figur 8

COMBINED DECLARATION AND  
POWER OF ATTORNEY

ATTORNEY DOCKET NO. 693

As a below-named inventor, I hereby declare that:

Andreas STOEHRMANN  
Marc-Aurel VOTH

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention **METHOD OF EDGE GLUEING, AND TENSIONING AGGREGATE WITH A DEVICE FOR EDGE GLUEING** the specification of which:

(Check one) X is attached hereto.

\_\_\_\_\_ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_ and

was amended on \_\_\_\_\_  
(if applicable)

was amended through \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section § 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

<u>198 27 647.8</u>	<u>DE</u>	<u>JUNE 22, 1998</u>	<u>X</u>	
Priority Number	Country	Date filed (Priority Date)	Yes	No
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>Yes</u>	<u>No</u>
Priority Number	Country	Date filed (Priority Date)	Yes	No
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>Yes</u>	<u>No</u>
Priority Number	Country	Date filed (Priority Date)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is

[illegible]

(Application Serial No.)	(Filing Date)	(Status - Patented, pending, abandoned)
09/678,456	01/15/2008	Patented
10/123,789	03/22/2009	Pending
11/456,123	05/10/2010	Abandoned

The undersigned hereby authorizes **Michael J. Striker** and the firm of **Striker, Striker & Stenby**, to accept and follow instructions from:

as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between Michael J. Striker, the firm of Striker, Striker & Stenby, and the undersigned. In the event of a change in the persons from whom instructions may be taken, Michael J. Striker and the firm of Striker, Striker & Stenby will be so notified by the undersigned.

Address all correspondence to: Striker, Striker & Stenby  
103 East Neck Road  
Huntington, New York 11743  
U.S.A.

